ASSEMBLY INSTRUCTIONS

MODEL#:RL1033

IOTE: Only the technical personnel can be allowto fix and maintain.

MPORTANT!

lake sure that the power is switch off at the electricity mains supply
efore commencing work.

IXING INSTRUCTIONS

. Open parts according to the bag as shown in figure B shows, installed
angs Taiwan screw, and should be fixed to the ceiling in the right place.
. Ground Connection (See picture 1): there are one tapping hole & two
imples.
ind the supply ground wire (2) on the green ground screw (15) and then pu
t into
apping hole. Connect the fixture ground wire (3) with supply ground wire
2) by connecting terminal (12). Caution: DO NOT connect ground wire with
upply power wire.
. Connect fixture supply wire with power supply wire . Caution: Remember
o distinguish the positive and negative charges. (See picture 2)
. Push canopy up to the ceiling and Lock cuttlefish nut

REPLACEMENT BULB

Do not exceed the maximum wattage.
Light bulbs recommended: RL1033 G4-6*20W Max. Type G4.

CLEANING CARE

Clean with a soft dry cloth.

SAFETY INFORMATION

1. Lamp used must in rated voltage, and do not touch the bulb with bare hands
Always switch off the electricity supply and allow to cool for 10 minutes
before changing the light bulbs.

2. If the external cables have been demaged, Pls change or repair by
manufacturer or service agency or professional electrician, In order to
avoid the danger.

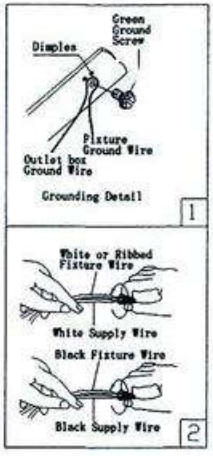

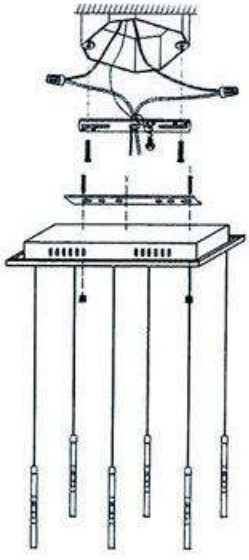

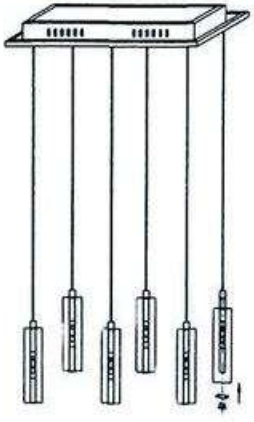

A